


HTD8 Timing Belts



Pitch 8 mm (.315")

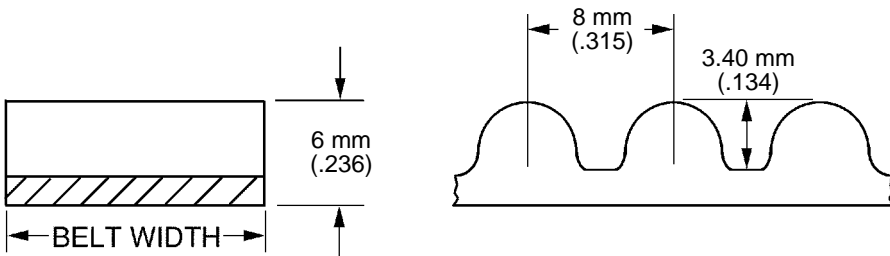

MATERIAL:

Nylon Covered, Fiberglass Reinforced, Neoprene

LOADING CAPACITY:

240 N/mm (1370 lbf/in.) Belt Width

BREAKING STRENGTH:

≥300 N/mm (1713 lbf/in.) Belt Width

TEMPERATURE RANGE:

-40°C to 120°C (-40°F to 248°F)

QB-HTD8 — —

PITCH LENGTH CODE

WIDTH CODE	Belt* Width
20	20 mm (.787)
30	30 mm (1.180)
50	50 mm (1.970)

PITCH LENGTH CODE	Pitch Length		No. of Teeth
	mm	Inch	
0328	328	12.913	41
0336	336	13.228	42
0368	368	14.488	46
0416	416	16.378	52
0424	424	16.693	53
0480	480	18.898	60
0512	512	20.157	64
0536	536	21.102	67
0560	560	22.047	70
0576	576	22.677	72
0600	600	23.622	75
0624	624	24.567	78
0632	632	24.882	79
0640	640	25.197	80
0656	656	25.827	82
0680	680	26.772	85
0712	712	28.031	89
0720	720	28.346	90
0760	760	29.921	95
0776	776	30.551	97

PITCH LENGTH CODE	Pitch Length		No. of Teeth
	mm	Inch	
0800	800	31.496	100
0840	840	33.071	105
0856	856	33.701	107
0864	864	34.016	108
0872	872	34.331	109
0880	880	34.646	110
0896	896	35.276	112
0920	920	36.220	115
0928	928	36.535	116
0952	952	37.480	119
0960	960	37.795	120
0968	968	38.110	121
1000	1000	39.370	125
1016	1016	40.000	127
1040	1040	40.945	130
1056	1056	41.575	132
1080	1080	42.520	135
1104	1104	43.465	138
1120	1120	44.094	140
1136	1136	44.724	142

PITCH LENGTH CODE	Pitch Length		No. of Teeth
	mm	Inch	
1152	1152	45.354	144
1168	1168	45.984	146
1184	1184	46.614	148
1200	1200	47.244	150
1216	1216	47.874	152
1248	1248	49.134	156
1256	1256	49.449	157
1264	1264	49.764	158
1280	1280	50.394	160
1304	1304	51.339	163
1312	1312	51.654	164
1344	1344	52.913	168
1360	1360	53.543	170
1392	1392	54.803	174
1400	1400	55.118	175
1424	1424	56.063	178
1440	1440	56.693	180
1456	1456	57.323	182
1520	1520	59.843	190
1576	1576	62.047	197

*Special Widths - cut to size from sleeves available from stock.

Continued on the next page


QTC, Econobelt & Zetasassi products are available from: MARYLAND METRICS
P.O.Box 261 Owings Mills, MD 21117 USA E-mail: sales@mdmetric.com
phones: (410)358-3130 (800)638-1830 faxes: (410)358-3142 (800)872-9329 url: http://mdmetric.com

copyright 2003 maryland metrics/qtc/econobelt/zetasassi

HTD8 Timing Belts



Pitch 8 mm (.315")

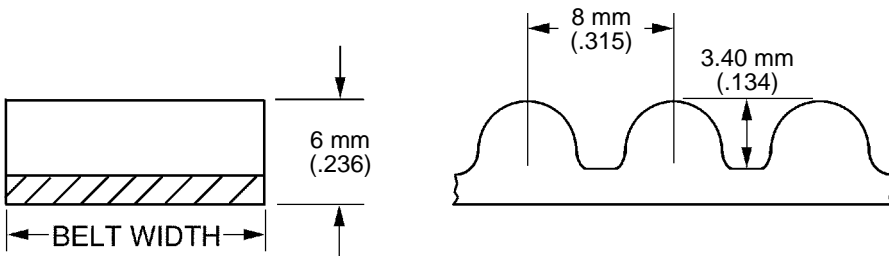

MATERIAL:

Nylon Covered, Fiberglass Reinforced, Neoprene

LOADING CAPACITY:

240 N/mm (1370 lbf/in.) Belt Width

BREAKING STRENGTH:

≥300 N/mm (1713 lbf/in.) Belt Width

TEMPERATURE RANGE:

-40°C to 120°C (-40°F to 248°F)

QB-HTD8 — —

PITCH LENGTH CODE

WIDTH CODE	Belt* Width
20	20 mm (.787)
30	30 mm (1.180)
50	50 mm (1.970)

PITCH LENGTH CODE	Pitch Length		No. of Teeth
	mm	Inch	
1600	1600	62.992	200
1696	1696	66.772	212
1760	1760	69.291	220
1792	1792	70.551	224
1800	1800	70.866	225
1896	1896	74.646	237
1904	1904	74.961	238
2000	2000	78.740	250
2080	2080	81.890	260
2104	2104	82.835	263
2208	2208	86.929	276
2240	2240	88.189	280
2392	2392	94.173	299

PITCH LENGTH CODE	Pitch Length		No. of Teeth
	mm	Inch	
2400	2400	94.488	300
2504	2504	98.583	313
2600	2600	102.362	325
2800	2800	110.236	350
3048	3048	120.000	381
3120	3120	122.835	390
3168	3168	124.724	396
3200	3200	125.984	400
3280	3280	129.134	410
3600	3600	141.732	450
5120	5120	201.575	640
5960	5960	234.646	745
6600	6600	259.843	825

*Special Widths - cut to size from sleeves available from stock.

QTC, Econobelt & Zetasassi products are available from: MARYLAND METRICS
P.O.Box 261 Owings Mills, MD 21117 USA E-mail: sales@mdmetric.com
phones: (410)358-3130 (800)638-1830 faxes: (410)358-3142 (800)872-9329 url: http://mdmetric.com

copyright 2003 maryland metrics/qtc/econobelt/zetasassi